


MODULAR HOT FOOD STATION



Item #: 196 Quantity: 2
 AIA: _____ Date: 23 FEB 11
 Project: IWAKUNI MCAS BLDG 222

Essence Series

Create a custom look with unique interlocking modules!

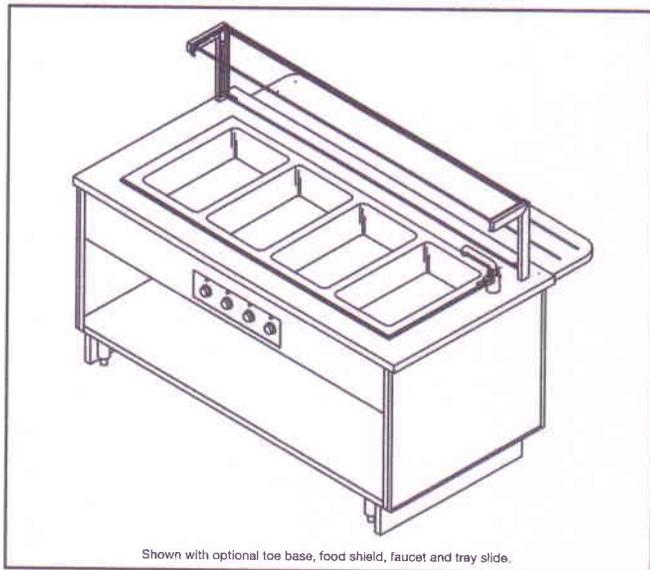

Shown with optional toe base, food shield, faucet and tray slide.

MODELS

- | | | |
|--------------------------------|--------------------------------|---|
| <input type="checkbox"/> HLS30 | <input type="checkbox"/> HLS54 | <input type="checkbox"/> HLS78 |
| <input type="checkbox"/> HLS36 | <input type="checkbox"/> HLS60 | → <input checked="" type="checkbox"/> HLS84 |
| <input type="checkbox"/> HLS42 | <input type="checkbox"/> HLS66 | <input type="checkbox"/> HLS90 |
| <input type="checkbox"/> HLS48 | <input type="checkbox"/> HLS72 | <input type="checkbox"/> HLS96 |

- 12 standard sizes available
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Available in 1-6 hot food well models
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.
- Hot Food Stations furnished with 1240 watt (each pan opening) drop in hot food wells.

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Other, specify: _____
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Hot Wells

- Standard 1240 watt drop in hot wells (standard) specify number of wells _____
- Hot well perimeter bun pan recess
- Other, specify: _____

Service Type

- Operator service
- Self service (wall unit)
- Two-sided (island)

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish (verify) R.A.L. color _____
- Fluorescent Lights
- Heat lamp strip with lights

Under Counter Options

- Removable under-shelf (standard)
- Enclosed under-shelf
- Heated Base
- Pan Slides

Counter Heights

- 34" high (standard)
- Available between 30" & 36" specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs (standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Plumbing Options

- Manifold drains with shut-off valve (standard)
- Individual drains
- Bottom exit with hosebib
- Recessed gate valve with pipe extension
- Water fill faucet

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

Operator Work Ledge

- White poly carving board on fixed brackets
- White poly carving board with fold-down brackets

Electrical Options *

- Duplex outlet, flush
- Duplex outlet, pedestal
- SINGLE 20 AMP RECEPTACLE**

Additional Options


- Bread storage well
- Plate dispenser




MODULAR HOT FOOD STATION




Item #: 196

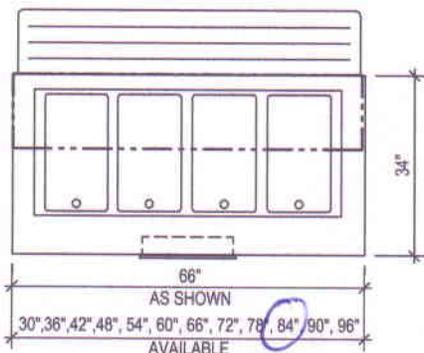

Plan View ↑

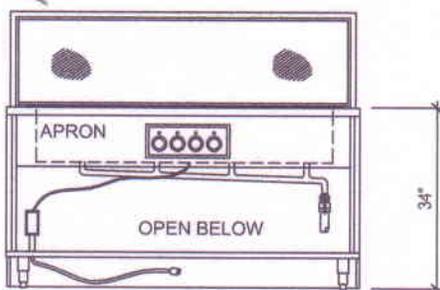

Elevation View ↑

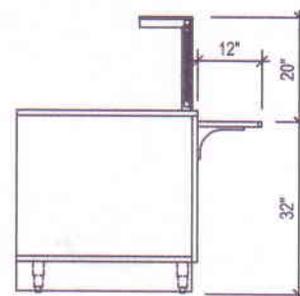

End View ↑

Shown with optional toe base, food shield, faucet, tray slide and outlet.

| Model | Dimensions LxWxH | Number of pan openings | | Electrical (standard 208V, 1 phase) | | | Plumbing Requirements* | Special Notes |
|---|---------------------|------------------------|------|-------------------------------------|------|-------|---------------------------|------------------|
| | | Available | Std. | Wattage | AMPS | NEMA | | |
| <input type="checkbox"/> HLS30 | 30"x34"x34" | 1 | 1 | 1240 | 6.0 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS36 | 36"x34"x34" | 1,2 | 2 | 2480 | 11.9 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS42 | 42"x34"x34" | 1,2 | 2 | 2480 | 11.9 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS48 | 48"x34"x34" | 1,2,3 | 3 | 3720 | 17.9 | 6-20P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS54 | 54"x34"x34" | 1,2,3 | 3 | 3720 | 17.9 | 6-20P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS60 | 60"x34"x34" | 1,2,3,4 | 4 | 4960 | 23.8 | 6-30P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS66 | 66"x34"x34" | 1,2,3,4 | 4 | 4960 | 23.8 | 6-30P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS72 | 72"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS78 | 78"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input checked="" type="checkbox"/> HLS84 | 84"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS90 | 90"x34"x34" | 1,2,3,4,5,6 | 6 | 7440 | 35.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS96 | 96"x34"x34" | 1,2,3,4,5,6 | 6 | 7440 | 35.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |

*Mechanical requirements may change depending on options chosen. * 1/2 H.W. required with faucet option.

Specifications: Short Form

Provide Multiteria Model # HLS 84 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™ (patent pending) fastening system. Base to be furnished with removable stainless steel undershelf. Undershelf depth to allow 4" clear open space for mechanical connections during installation.

Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or service. Décor end panels shall be removable without the use of tools. Tight

Link™ system shall eliminate top separation, and allows mechanical connections to run from counter to counter, reducing the number of building mechanicals in the floor or wall.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Hot Well Units: Drop in 1240 watt hot well units shall include drains, drain manifold and drain shut-off valve as standard equipment.

Tight Link™ (patent pending)

Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.



Due to continuing product improvement, units and specifications are subject to change without notice. (10/2007)


MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
 TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM



ANSI/NSF 2

VERSA-GARD®

Copyright © 2006 Versa-Gard® All rights reserved.

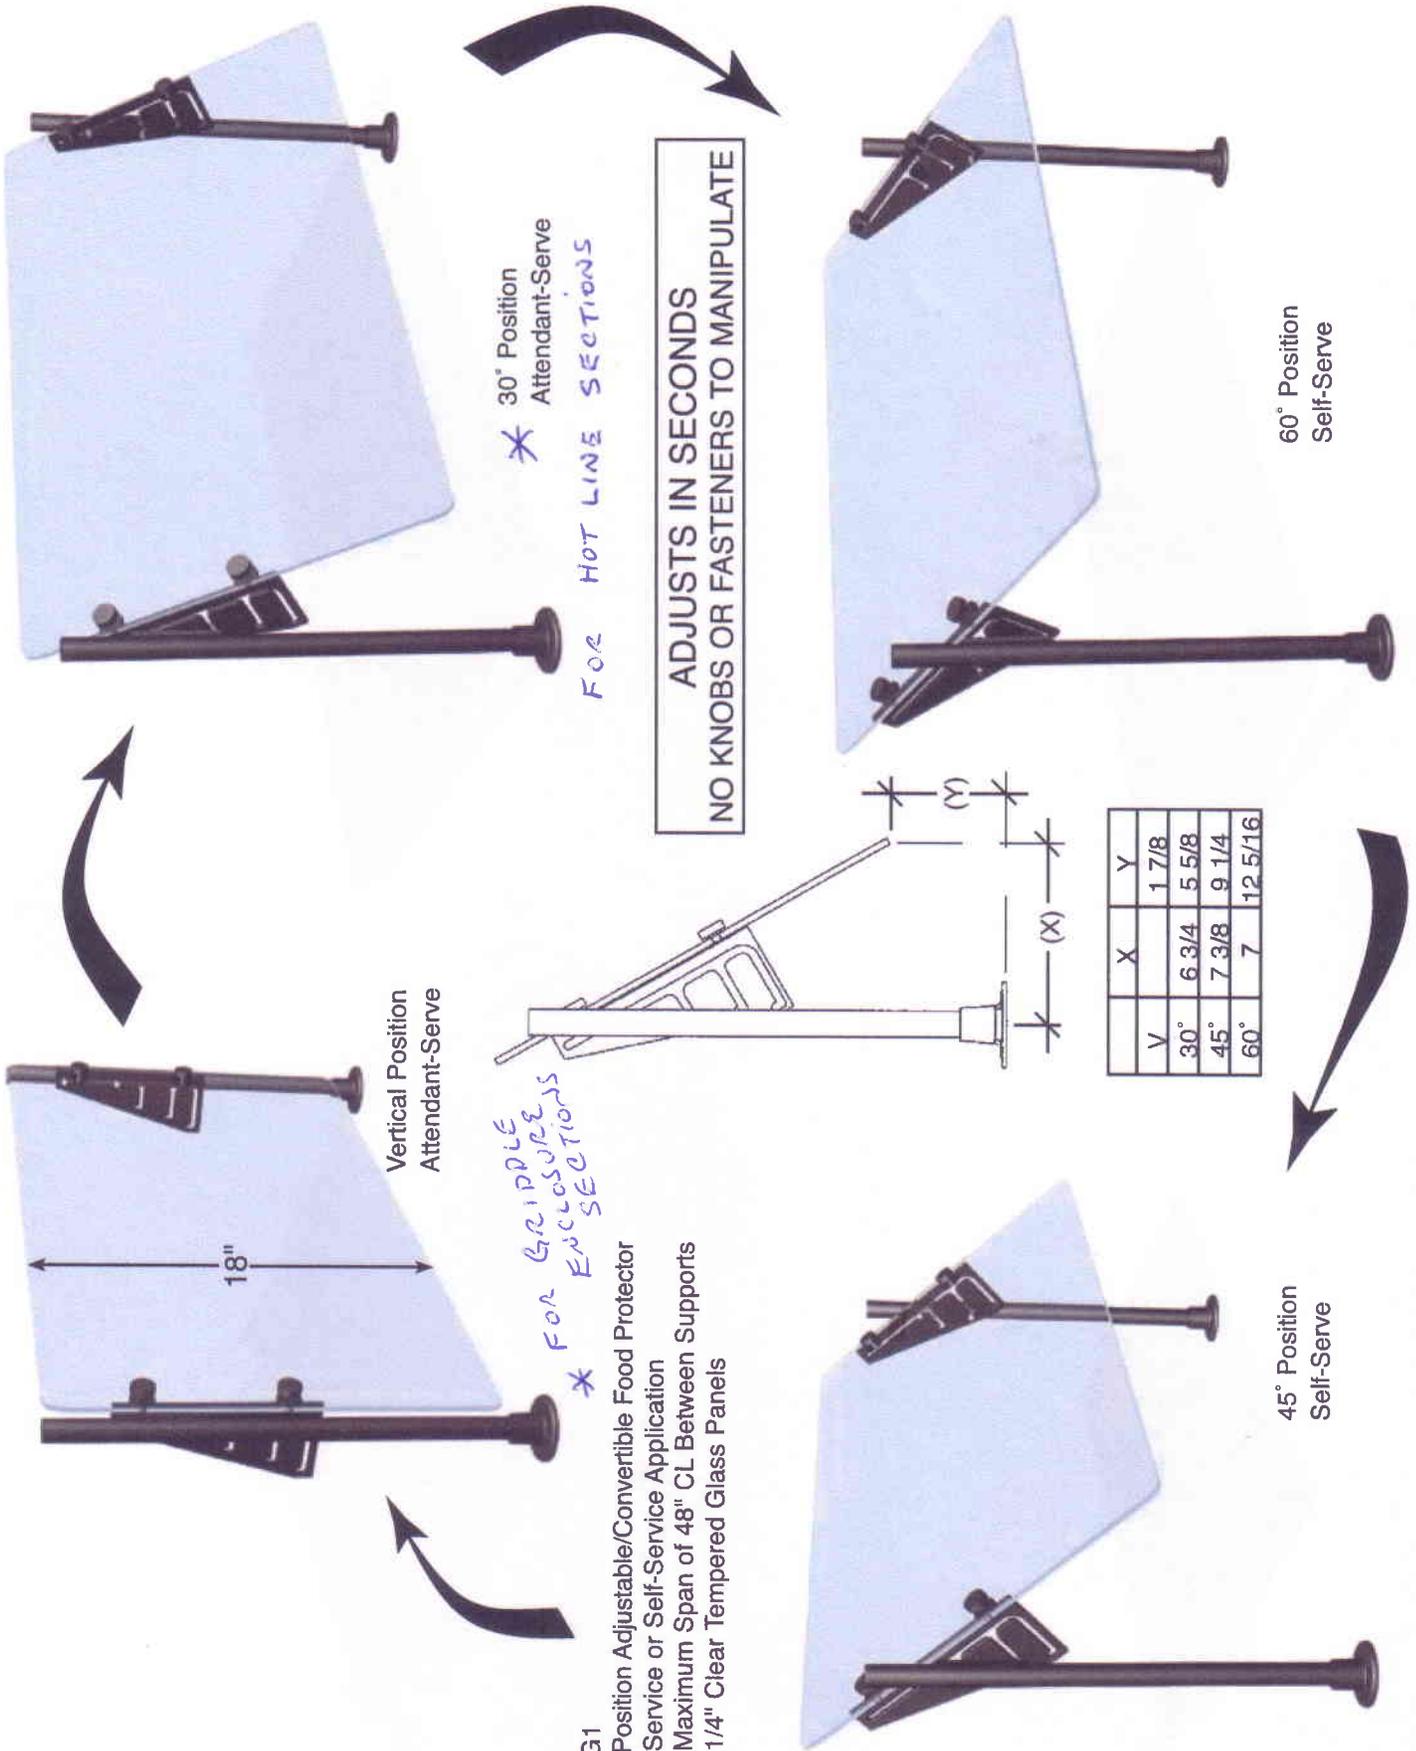

VG1

4-Position Adjustable/Convertible Food Protector

- Service or Self-Service Application
- Maximum Span of 48" CL Between Supports
- 1/4" Clear Tempered Glass Panels

MODULAR CASHIER STATION



Item #: 213 Quantity: 1
 AIA: _____ Date: 23 FEB 11
 Project: IWAKUNI MCAS BLOG 222

Essence Series



Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Other, specify: _____
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg. _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Counter Heights

- 34" high (standard)
- Available between 30" 36" specify height: _____

Kickplate & Casters

- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Under Counter Options

- Locking cashier drawer (standard)

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

Electrical Options *

- Duplex outlet, flush (standard)
- Duplex outlet, pedestal

* QUAD NEMA 5-20R RECEPTACLE

* LOAD CENTER FOR ALL ELECTRIC ALL EQUIPMENT WIRED TO LOAD CENTER

MODELS

- CS30
- CS36
- CS60

- 3 standard sizes available
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Available in three counter applications – in-line, free-standing single operator and free-standing double operator.
- Free-standing models feature tray slides available on both sides or on one.
- Interchangeable top configurations available.
- Stainless steel under-shelf standard.




MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
 TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR CASHIER STATION




Item #: _____

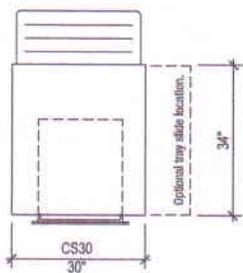


Plan View ↑

**In-line model
CS30**

MODIFY FROM STANDARDS




Elevation View ↑

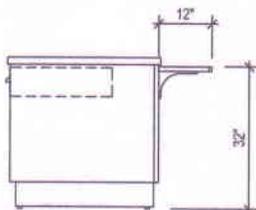


End View ↑

**Free-standing
models
CS36 & CS60**


Shown with optional toe base tray slide, and duplex outlet.

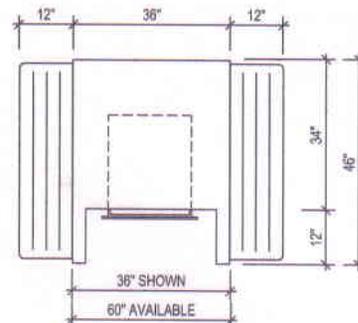

Plan View ↑



Elevation View ↑

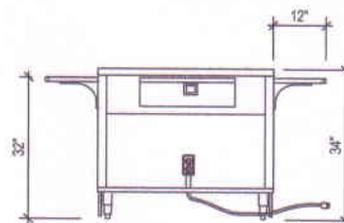

End View ↑

| Model | Dimensions LxWxH | Counter Length | Operator | Tray Rails | Cash Drawers | Electric | Special Notes |
|--|------------------|----------------|----------|------------|--------------|------------------------------|---------------|
| <input checked="" type="checkbox"/> CS30 | 30"x34"x34" | 30" | 1 | 1 | 1 | 120V, 1 phase, 20 amp D.C.O. | |
| <input type="checkbox"/> CS36 | 36"x34"x34" | 36" | 1 | 2 | 1 | 120V, 1 phase, 20 amp D.C.O. | |
| <input type="checkbox"/> CS60 | 60"x34"x34" | 60" | 2 | 2 | 2 | 120V, 1 phase, 20 amp D.C.O. | |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # CS 30 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™(patent pending) fastening system. Base to be furnished with removable stainless steel undershelf. Undershelf depth to allow 4" clear open space for mechanical connections during installation.

Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame with out the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)

Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.



Due to continuing product improvement, units and specifications are subject to change without notice.

(10/2007)


MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINGOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION



Item #: 197 Quantity: 1
 AIA: _____ Date: 23 FEB 11
 Project: IWAKUNI MCAS BLDG 222

Essence Series

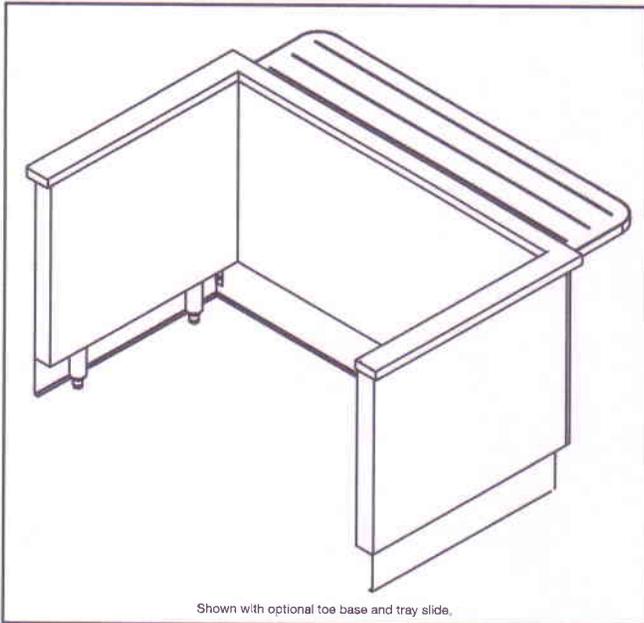

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Service Type

- Operator service

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish (verify) R.A.L. color _____
- Fluorescent lights
- Heat lamp strip with lights

Counter Heights

- 34" high (standard)
- Available between 30" & 36" specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs (standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

MODELS

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> LNL-OT30 | <input type="checkbox"/> LNL-OT54 | <input type="checkbox"/> LNL-OT78 |
| <input type="checkbox"/> LNL-OT36 | <input type="checkbox"/> LNL-OT60 | <input type="checkbox"/> LNL-OT84 |
| <input type="checkbox"/> LNL-OT42 | <input type="checkbox"/> LNL-OT66 | <input type="checkbox"/> LNL-OT90 |
| <input type="checkbox"/> LNL-OT48 | <input type="checkbox"/> LNL-OT72 | <input type="checkbox"/> LNL-OT96 |

- **12 standard sizes available**
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.




MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
 TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION



Item #: 197

MODIFY LENGTH FROM STANDARDS

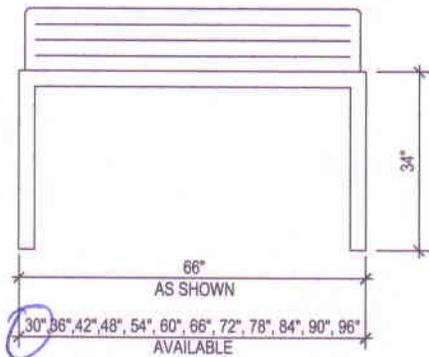


Plan View ↑



Shown with optional toe base and tray slide. Verify size of buyout unit.

Elevation View ↑

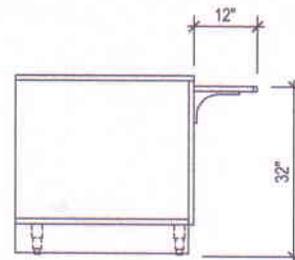

End View ↑

| Model | Dimensions LxWxH | Electrical Requirements | Plumbing Requirements | Special Notes |
|--|------------------|-------------------------|-----------------------|---------------|
| <input checked="" type="checkbox"/> LNL-OT30 | 30"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT36 | 36"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT42 | 42"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT48 | 48"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT54 | 54"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT60 | 60"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT66 | 66"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT72 | 72"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT78 | 78"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT84 | 84"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT90 | 90"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT96 | 96"x34"x34" | N/A | N/A | E,H,I |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # LNL-OT 30 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™(patent pending) fastening system. Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or

service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)
Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.




Due to continuing product improvement, units and specifications are subject to change without notice. (10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR HOT FOOD STATION



Essence Series

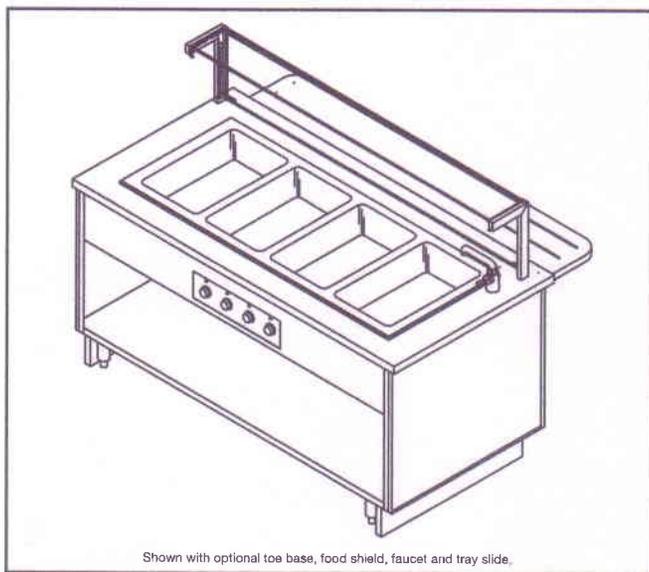

Shown with optional toe base, food shield, faucet and tray slide.

MODELS

- | | | |
|--------------------------------|--------------------------------|---|
| <input type="checkbox"/> HLS30 | <input type="checkbox"/> HLS54 | <input type="checkbox"/> HLS78 |
| <input type="checkbox"/> HLS36 | <input type="checkbox"/> HLS60 | <input checked="" type="checkbox"/> HLS84 |
| <input type="checkbox"/> HLS42 | <input type="checkbox"/> HLS66 | <input type="checkbox"/> HLS90 |
| <input type="checkbox"/> HLS48 | <input type="checkbox"/> HLS72 | <input type="checkbox"/> HLS96 |

- 12 standard sizes available
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Available in 1-6 hot food well models
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.
- Hot Food Stations furnished with 1240 watt (each pan opening) drop in hot food wells.

Item #: 211 Quantity: 2
 AIA: _____ Date: 23 FEB 11
 Project: IWAKONI MCAS BLDG 222

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Other, specify: _____
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Hot Wells

- Standard 1240 watt drop in hot wells (standard) specify number of wells _____
- Hot well perimeter bun pan recess
- Other, specify: _____

Service Type

- Operator service
- Self service (wall unit)
- Two-sided (island)

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish (verify) R.A.L. color _____
- Fluorescent Lights
- Heat lamp strip with lights

Under Counter Options

- Removable under-shelf (standard)
- Enclosed under-shelf
- Heated Base
- Pan Slides

Counter Heights

- 34" high (standard)
- Available between 30" & 36" specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs (standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Plumbing Options

- Manifold drains with shut-off valve (standard)
- Individual drains
- Bottom exit with hosebib
- Recessed gate valve with pipe extension
- Water fill faucet

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

Operator Work Ledge

- White poly carving board on fixed brackets
- White poly carving board with fold-down brackets

Electrical Options *

- Duplex outlet, flush
 - Duplex outlet, pedestal
- 20 AMP RECEPTACLE

Additional Options


- Bread storage well
- Plate dispenser




MODULAR HOT FOOD STATION




Item #: _____

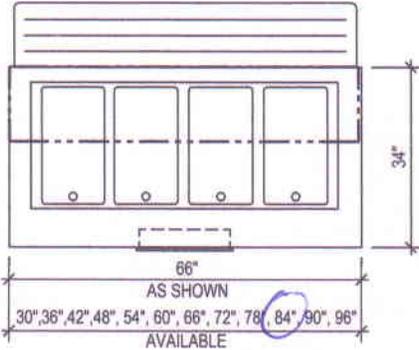

Plan View ↑

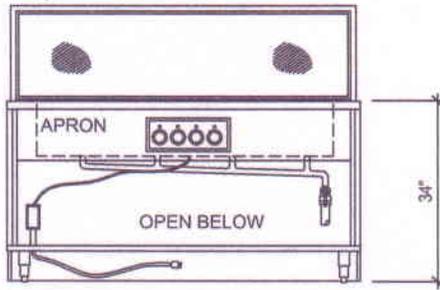

Elevation View ↑

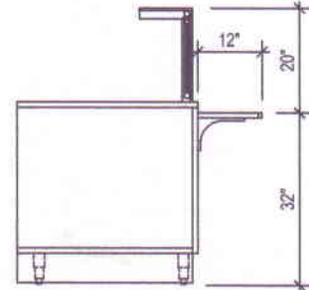

End View ↑

| Model | Dimensions LxWxH | Number of pan openings | | Electrical (standard 208V, 1 phase) | | | Plumbing Requirements* | Special Notes |
|---|---------------------|------------------------|------|-------------------------------------|------|-------|---------------------------|------------------|
| | | Available | Std. | Wattage | AMPS | NEMA | | |
| <input type="checkbox"/> HLS30 | 30"x34"x34" | 1 | 1 | 1240 | 6.0 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS36 | 36"x34"x34" | 1,2 | 2 | 2480 | 11.9 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS42 | 42"x34"x34" | 1,2 | 2 | 2480 | 11.9 | 6-15P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS48 | 48"x34"x34" | 1,2,3 | 3 | 3720 | 17.9 | 6-20P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS54 | 54"x34"x34" | 1,2,3 | 3 | 3720 | 17.9 | 6-20P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS60 | 60"x34"x34" | 1,2,3,4 | 4 | 4960 | 23.8 | 6-30P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS66 | 66"x34"x34" | 1,2,3,4 | 4 | 4960 | 23.8 | 6-30P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS72 | 72"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS78 | 78"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input checked="" type="checkbox"/> HLS84 | 84"x34"x34" | 1,2,3,4,5 | 5 | 6200 | 29.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS90 | 90"x34"x34" | 1,2,3,4,5,6 | 6 | 7440 | 35.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |
| <input type="checkbox"/> HLS96 | 96"x34"x34" | 1,2,3,4,5,6 | 6 | 7440 | 35.8 | 6-50P | 3/4" waste | C,D,F,G,H,I |

*Mechanical requirements may change depending on options chosen. * 1/2 H.W. required with faucet option.

Specifications: Short Form

Provide Multiteria Model # HLS 84 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turnaround all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™ (patent pending) fastening system. Base to be furnished with removable stainless steel undershelf. Undershelf depth to allow 4" clear open space for mechanical connections during installation.

Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or service. Décor end panels shall be removable without the use of tools. Tight

Link™ system shall eliminate top separation, and allows mechanical connections to run from counter to counter, reducing the number of building mechanicals in the floor or wall.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turnaround, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Hot Well Units: Drop in 1240 watt hot well units shall include drains, drain manifold and drain shut-off valve as standard equipment.

Tight Link™ (patent pending)
Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.



Due to continuing product improvement, units and specifications are subject to change without notice.


(10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION

Item #: 208 Quantity: 1AIA: _____ Date: 23 FEB 11Project: TWAKUNI MCAS BLDG 222

Essence Series

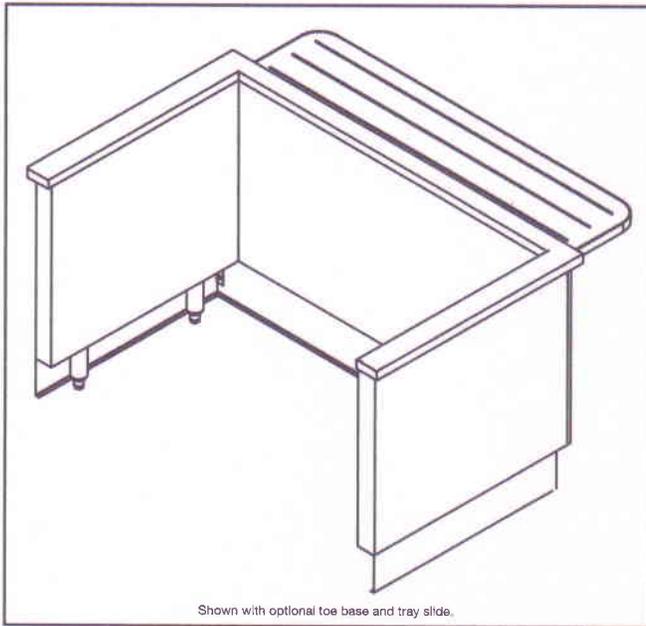

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Common top (contact factory)

Exterior Panels

- Laminate panels
specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate
(contact factory)

Service Type

- Operator service

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish
(verify) R.A.L. color _____
- Fluorescent lights
- Heat lamp strip with lights

Counter Heights

- 34" high (standard)
- Available between 30" & 36"
specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs
(standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Tray Slide Options

- "V" ridge stainless steel
(standard)
- Laminate with plastic tray runners
and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

MODELS


- | | | |
|-----------------------------------|--|-----------------------------------|
| <input type="checkbox"/> LNL-OT30 | <input type="checkbox"/> LNL-OT54 | <input type="checkbox"/> LNL-OT78 |
| <input type="checkbox"/> LNL-OT36 | <input type="checkbox"/> LNL-OT60 | <input type="checkbox"/> LNL-OT84 |
| <input type="checkbox"/> LNL-OT42 | <input checked="" type="checkbox"/> LNL-OT66 | <input type="checkbox"/> LNL-OT90 |
| <input type="checkbox"/> LNL-OT48 | <input type="checkbox"/> LNL-OT72 | <input type="checkbox"/> LNL-OT96 |

- **12 standard sizes available**
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.




MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM


MODULAR LOCK-N-LOAD OPEN TOP STATION

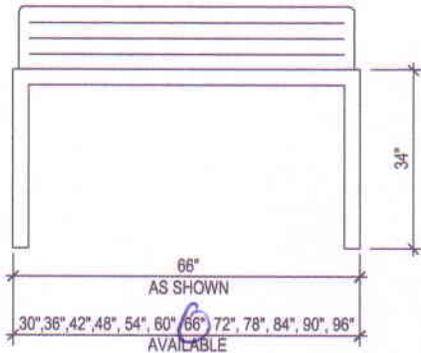Item #: 208

Plan View ↑

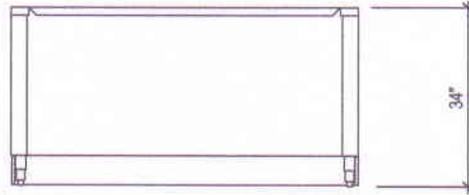Shown with optional toe base and tray slide.
Verify size of buyout unit.

Elevation View ↑

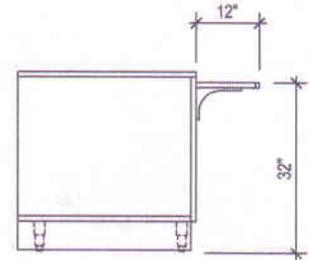

End View ↑

| Model | Dimensions LxWxH | Electrical Requirements | Plumbing Requirements | Special Notes |
|--|---------------------|----------------------------|--------------------------|---------------|
| <input type="checkbox"/> LNL-OT30 | 30"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT36 | 36"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT42 | 42"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT48 | 48"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT54 | 54"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT60 | 60"x34"x34" | N/A | N/A | E,H,I |
| <input checked="" type="checkbox"/> LNL-OT66 | 66"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT72 | 72"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT78 | 78"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT84 | 84"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT90 | 90"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT96 | 96"x34"x34" | N/A | N/A | E,H,I |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # LNL-OT 66 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™ (patent pending) fastening system. Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or

service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)

Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.



Due to continuing product improvement, units and specifications are subject to change without notice.


(10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION

Item #: 203 Quantity: 1AIA: _____ Date: 23 FEB 11Project: IWAKUNI MCAS BLDG 222

Essence Series

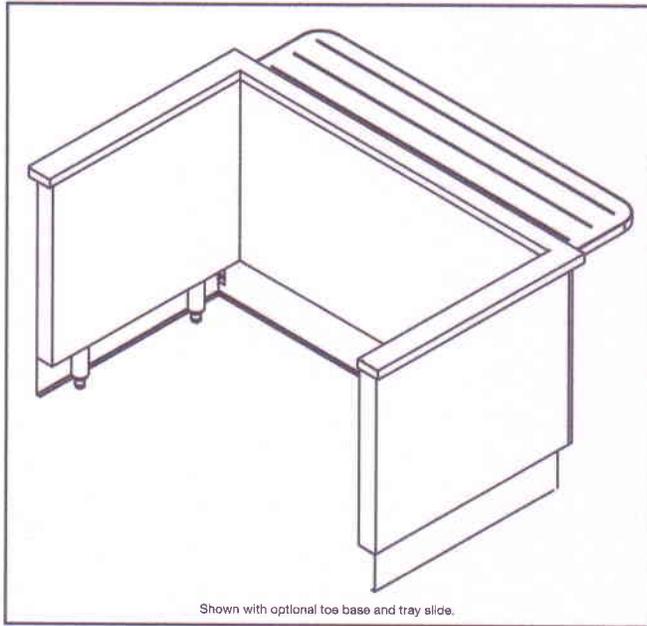

Shown with optional toe base and tray slide.

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Service Type

- Operator service

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish (verify) R.A.L. color _____
- Fluorescent lights
- Heat lamp strip with lights

Counter Heights

- 34" high (standard)
- Available between 30" & 36" specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs (standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

MODELS


- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> LNL-OT30 | <input type="checkbox"/> LNL-OT54 | <input type="checkbox"/> LNL-OT78 |
| <input type="checkbox"/> LNL-OT36 | <input type="checkbox"/> LNL-OT60 | <input type="checkbox"/> LNL-OT84 |
| <input type="checkbox"/> LNL-OT42 | <input type="checkbox"/> LNL-OT66 | <input type="checkbox"/> LNL-OT90 |
| <input type="checkbox"/> LNL-OT48 | <input type="checkbox"/> LNL-OT72 | <input type="checkbox"/> LNL-OT96 |

- 12 standard sizes available
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.




MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM


MODULAR LOCK-N-LOAD OPEN TOP STATION

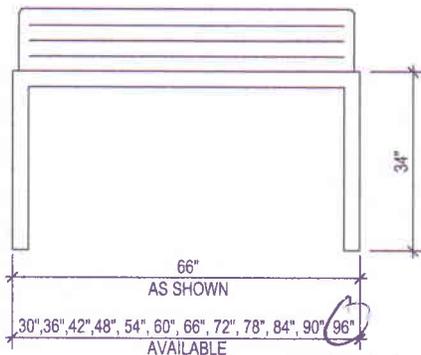Item #: 203

Plan View ↑

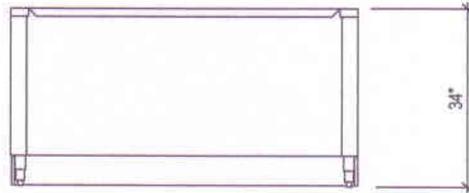Shown with optional toe base and tray slide.
Verify size of buyout unit.

Elevation View ↑

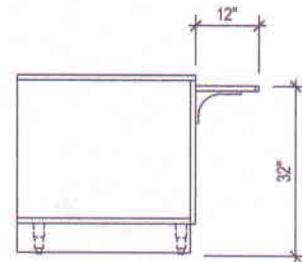

End View ↑

| Model | Dimensions LxWxH | Electrical Requirements | Plumbing Requirements | Special Notes |
|--|---------------------|----------------------------|--------------------------|---------------|
| <input type="checkbox"/> LNL-OT30 | 30"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT36 | 36"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT42 | 42"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT48 | 48"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT54 | 54"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT60 | 60"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT66 | 66"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT72 | 72"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT78 | 78"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT84 | 84"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT90 | 90"x34"x34" | N/A | N/A | E,H,I |
| <input checked="" type="checkbox"/> LNL-OT96 | 96"x34"x34" | N/A | N/A | E,H,I |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # LNL-OT 96 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™ (patent pending) fastening system. Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or

service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)

Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.



Due to continuing product improvement, units and specifications are subject to change without notice.


(10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR CASHIER STATION

Item #: 198 Quantity: 1AIA: _____ Date: 23 FEB 11Project: IWAKUNI MCAS BLDG 222

Essence Series

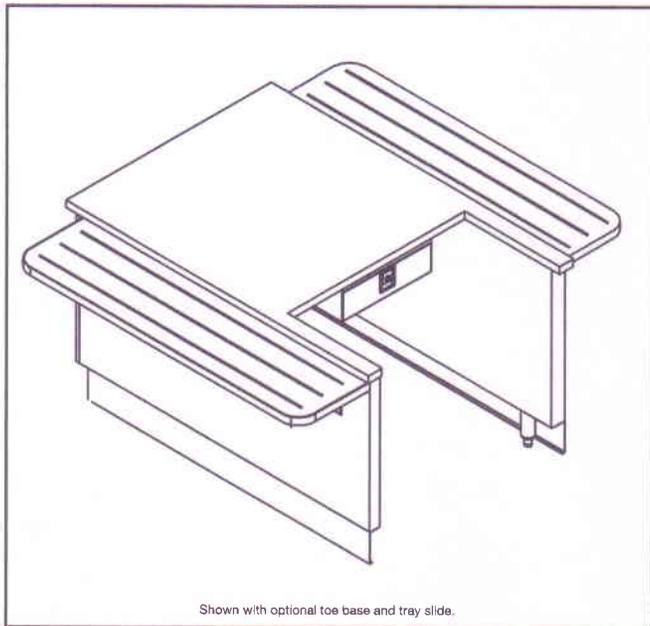

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Other, specify: _____
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg. _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Counter Heights

- 34" high (standard)
- Available between 30" 36" specify height: _____

Kickplate & Casters

- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Under Counter Options

- Locking cashier drawer (standard)

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

Electrical Options *

- Duplex outlet, flush (standard)
- Duplex outlet, pedestal

* **QUAD NEMA 5-20 RECEPTACLE**

* **ELECTRIC LOAD CENTER**

* **ALL EQUIPMENT WIRED TO LOAD CENTER**

MODELS

- CS30**
- CS36**
- CS60**

- **3 standard sizes available**
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Available in three counter applications – in-line, free-standing single operator and free-standing double operator.
- Free-standing models feature tray slides available on both sides or on one.
- Interchangeable top configurations available.
- Stainless steel under-shelf standard.



MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR CASHIER STATION







Item #: 198



**In-line model
CS30**

**Free-standing
models
CS36 & CS60**

Shown with optional toe base tray slide, and duplex outlet.

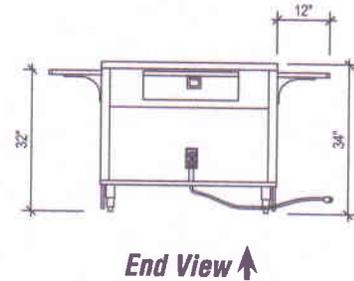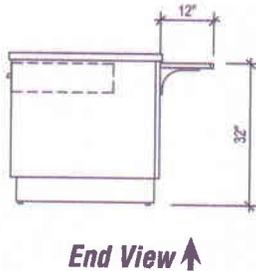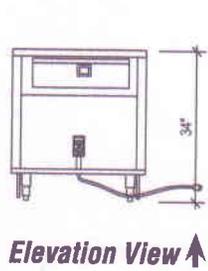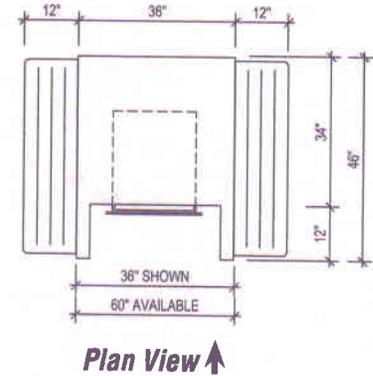

MODIFY FROM STANDARD

| Model | Dimensions LxWxH | Counter Length | Operator | Tray Rails | Cash Drawers | Electric | Special Notes |
|--|------------------|----------------|----------|------------|--------------|------------------------------|------------------|
| <input checked="" type="checkbox"/> CS30 | 30"x34"x34" | 30" | 1 | 1 | 1 | 120V, 1 phase, 20 amp D.C.O. | QUAD NEMA 5-20 R |
| <input type="checkbox"/> CS36 | 36"x34"x34" | 36" | 1 | 2 | 1 | 120V, 1 phase, 20 amp D.C.O. | |
| <input type="checkbox"/> CS60 | 60"x34"x34" | 60" | 2 | 2 | 2 | 120V, 1 phase, 20 amp D.C.O. | |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # CS 30 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turndown all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™ (patent pending) fastening system. Base to be furnished with removable stainless steel undershelf. Undershelf depth to allow 4" clear open space for mechanical connections during installation.

Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turndown, and shall be removable from frame with out the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)

Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

ELECTRIC LOAD CENTER, ALL WIRED TO LOAD CENTER



Due to continuing product improvement, units and specifications are subject to change without notice. (10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION




Item #: 212 Quantity: 1

AIA: _____ Date: 23 FEB 11

Project: IWAKUNI MCAS BLDG 222

Essence Series

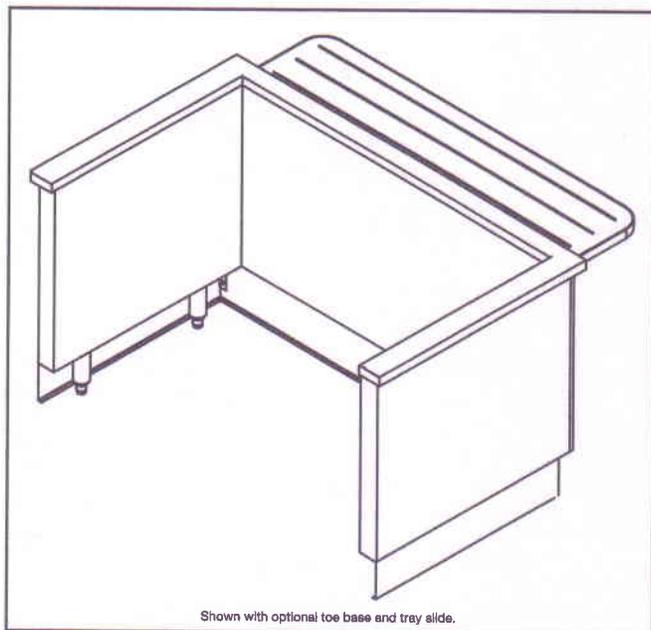

Create a custom look with
unique interlocking modules!

OPTIONS & ACCESSORIES

Countertop Material

- 14 gauge 300 series stainless steel (standard)
- Zodiac® Quartz
- Corian® solid surface
- Laminate
- Common top (contact factory)

Exterior Panels

- Laminate panels specify mfg./color _____
- Stainless steel panels
- Custom decorative laminate (contact factory)

Service Type

- Operator service

Food Protector Style

- FS (standard)
- VG 1" tubular style

Display Shelves

- Single glass display shelf
- 2-tier glass display shelf

Food Protector Options

- Black powder coat finish
- Stainless steel
- Other powder coat finish (verify) R.A.L. color _____
- Fluorescent lights
- Heat lamp strip with lights

Counter Heights

- 34" high (standard)
- Available between 30" & 36" specify height: _____

Kickplate & Casters

- 6" adjustable stainless steel legs (standard)
- Black powder coated kickplate
- Stainless steel kickplate
- 5" casters

Tray Slide Options

- "V" ridge stainless steel (standard)
- Laminate with plastic tray runners and vinyl edge
- Flat stainless steel
- Zodiac® Quartz
- Corian® solid surface
- Top extension (in lieu of tray rails)

MODELS

- | | | |
|--|-----------------------------------|-----------------------------------|
| <input checked="" type="checkbox"/> LNL-OT30 | <input type="checkbox"/> LNL-OT54 | <input type="checkbox"/> LNL-OT78 |
| <input type="checkbox"/> LNL-OT36 | <input type="checkbox"/> LNL-OT60 | <input type="checkbox"/> LNL-OT84 |
| <input type="checkbox"/> LNL-OT42 | <input type="checkbox"/> LNL-OT66 | <input type="checkbox"/> LNL-OT90 |
| <input type="checkbox"/> LNL-OT48 | <input type="checkbox"/> LNL-OT72 | <input type="checkbox"/> LNL-OT96 |

- **12 standard sizes available**
- **Tight Link** interlocking mechanism (patent pending) eliminates vertical and horizontal gaps between counters.
- Durable welded 300 series stainless steel tubular frame
- Interchangeable exterior panels match or compliment any décor.
- Common tops available up to 18'-0".
- All food shields utilize 3/8" tempered glass panels to maximize merchandising.
- Interchangeable top configurations available.




MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM

MODULAR LOCK-N-LOAD OPEN TOP STATION




Item #: _____


MODIFY FROM STANDARD

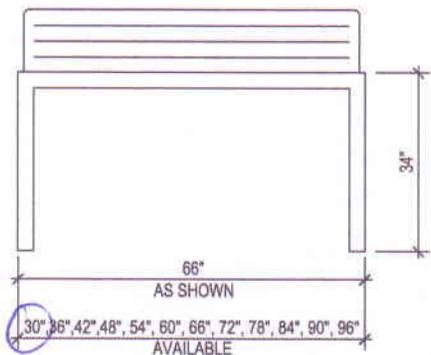

Plan View ↑

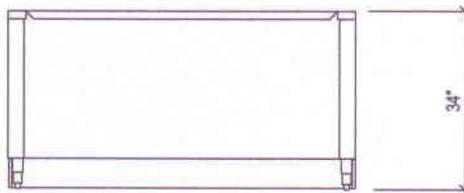

Elevation View ↑

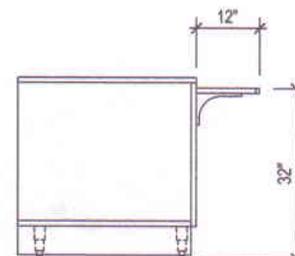

End View ↑

| Model | Dimensions LxWxH | Electrical Requirements | Plumbing Requirements | Special Notes |
|--|------------------|-------------------------|-----------------------|---------------|
| <input checked="" type="checkbox"/> LNL-OT30 | 30"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT36 | 36"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT42 | 42"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT48 | 48"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT54 | 54"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT60 | 60"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT66 | 66"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT72 | 72"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT78 | 78"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT84 | 84"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT90 | 90"x34"x34" | N/A | N/A | E,H,I |
| <input type="checkbox"/> LNL-OT96 | 96"x34"x34" | N/A | N/A | E,H,I |

**Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # LNL-OT 30 to be constructed with heavy duty welded stainless steel tubular frame. Counter top to be manufactured with 14 gauge 300 series stainless steel with 1-1/2" top turnaround all welds to be ground and polished to provide #4 finish. Furnish easily removable and interchangeable 3/4" laminated MDF front and end panels. Panels to have prime laminate front and all edges with white laminate interior liner.

Specifications: Detailed

Body Frame: Body to be welded and polished, 1" stainless steel framework. Body frame made to readily accept 3/4" laminated décor panels to allow panel changing without the use of tools. Body frame made to accept Tight Link™(patent pending) fastening system. Unit shall rest on 6" high stainless steel legs with stainless steel adjustable feet.

Front décor panels: Panels to be 3/4" MDF panels with plastic laminate front, back and edges. Shall be removable by removing tray rail brackets for convenient front access for plumbing and electrical connections or

service. Décor end panels shall be removable without the use of tools.

Counter Top: Top shall be made of 300 series stainless steel with 1-1/2" top turnaround, and shall be removable from frame without the use of tools to allow for service, initial installation of mechanicals or remodeling requiring a revised top configuration. Top shall include stainless steel support channels and shall be constructed to accommodate remodeling of the counter at a later date to accept an alternate material top without changing the work height.

Tight Link™ (patent pending)
Furnish with linking system that links adjacent counters together the entire depth and height of the counter. Linking system shall eliminate top, front and rear horizontal and vertical gaps between equipment. Linking system to be open to allow mechanical connections to run through adjoining counters without having to cut access holes reducing the number of building mechanicals required to connect equipment.

NOTES

- A. Cold pan units provided with 115V, 6' 0" cord and plug.
- B. Cold pan drain provided with shutoff valve.
- C. Hot well drains are manifolded and provided with shutoff valve.
- D. Hot food units provided standard with junction box electrical connection. Consult factory for optional connection services.
- E. Standard unit comes with no mechanical connections. Consult factory for optional connection services.
- F. Counters are available with any combination of drop-in units. Consult factory for optional configurations.
- G. 4" access is provided behind undershelf for mechanicals. Specify requirements at time of order.
- H. Common tops are available up to 18' 0" lengths and can be used to decrease number of top seams.
- I. Special custom applications... see specs or drawing.



Due to continuing product improvement, units and specifications are subject to change without notice. (10/2007)

MULTITERIA • 100 TRI-STATE INTERNATIONAL OFFICE CENTER, SUITE 215 • LINCOLNSHIRE, IL 60069
TEL: 770-753-2686 • FAX: 770-753-9097 • WWW.MULTITERIAUSA.COM